EOS MYTHOS S35 7.5 KW

FLOOR-STANDING SAUNA HEATER EOS-MYT-E75-240





Exclusive award-winning sauna heater for the dry Finnish sauna in distinctive cubistic design with the unique pillar-alike foot. Cubius stones add the crowning touch to the outstanding design of this state-of-the-art model.

- · Choice of different finishes: anthracite, brushed steel, matte black or white.
- · Durable, long-lasting construction, all made of stainless steel.
- · Uniform appearance on all sides, great for installation in front of glass panels.
- · Slim, space-saving construction only 1.2 ft depth.
- Moderm cubic stone display.

TECHNICAL SPECIFICATION

Voltage	Breaker size	Wire size	Sauna volume	Sauna volume	Weight
	AMPS	AWG	min. cu. ft.	max. cu. ft.	
208 V 3Ph AC 60 Hz	50	12	280	420	74 Lb.
240 V 2Ph AC 60 Hz	40	10	280	420	74 Lb.

Page 1





CODES / STANDARDS



Intertek 5023683 CONFORMS TO UL STD 875 CERTIFIED TO CAN/CSA STD E60335-1/4E E60335-2-53



Limited Warranty

2 year residential (use limited)

AVAILABLE COLORS

White



ACCESORIES

- Bucket with ladle.
- · Sauna fragrances.
- Rocks. (77 Lb.)
- Mounting brackets for safety guard rail


INTERCHANGABLE ROCKS


Cubius stones optionally available with extra height or as Cubius Loop. Some items can be sold separately.












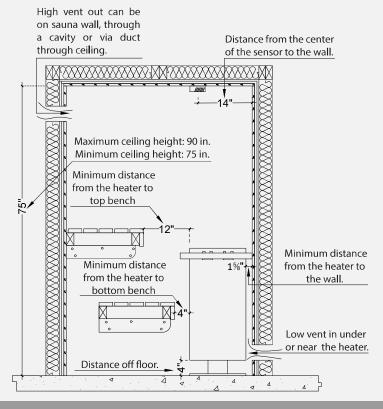


SPECIFICATIONS









CONTROL PANEL EOS EMOTEC AND POWER SUPPLY

The control panel and power supply must be installed in a dry place, away from spa, pool, or shower, and not outdoors. A receptacle should not be installed inside the sauna room.

INSTALLATION REQUIREMENTS

- Sauna heater
- •Control panel Eos Emotec
- Sensor
- Power supply for control unit

WIRING DIAGRAM

